

SCHURR

MORSETASTEN

Pflegeanleitung für den neuen PROFI - 2

Sie haben sich zum Kauf eines SCHURR WABBLERS entschieden. Vielleicht auf Empfehlung eines zufriedenen OM. Damit Sie an Ihrem neuen WABBLER lange Freude haben, einige Hinweise zur Wartung und Pflege, die Sie beachten sollten. SCHURR TASTEN und WABBLER sind aus Messing (MS 58) hergestellt, das fein geschliffen und mit einer Schutzlackierung gegen Korrosion versehen ist. Die WABBLER sind nur für die Anwendung im Innenbereich konzipiert. Er darf also nicht mit Feuchtigkeit in Berührung kommen. Die Mechanik wird mit einer allseitig geschlossenen Plexiglashaube vor Staub geschützt. Die Haube lässt sich nach hinten aufklappen. Zum reinigen des Wabblers verwenden Sie nur ein trockenes weiches Tuch. Zum reinigen der Kontakte verwenden Sie das beigelegte Papier oder ein ähnliches. Keinesfalls glattes, geputertes Papier. An das freie Kabelende löten sie einen zu Ihrem Gerät passenden Stecker.


Dabei ist die Abschirmung Masse - rot ist der Strich - Weiß der Punkt

Zum reinigen der Plexiglashaube verwende ich "POLIBOY" das auch ANTISTATISCH wirkt und staubabweisend ist.

Mit den Kontaktschrauben (1) können Sie Ihren gewünschten Kontaktabstand einstellen, mit der Einstellmutter (4) wird der von Ihnen bevorzugte Federdruck eingestellt. Beim reinigen der Kontakte achten Sie darauf, daß Sie auch gleich den Anschlag mitreinigen. Achten Sie auch darauf, daß die Kontaktschrauben nicht zu leicht gehen, oder gar lose sind.

Sollten Sie noch Fragen haben, bin ich gerne bereit sie zu beantworten Tel.: 07146 - 42727. weiterhin wünsche ich Ihnen viel Spaß und viele nette Verbindungen.

Ihr Gerhard Schurr
DH2SAA


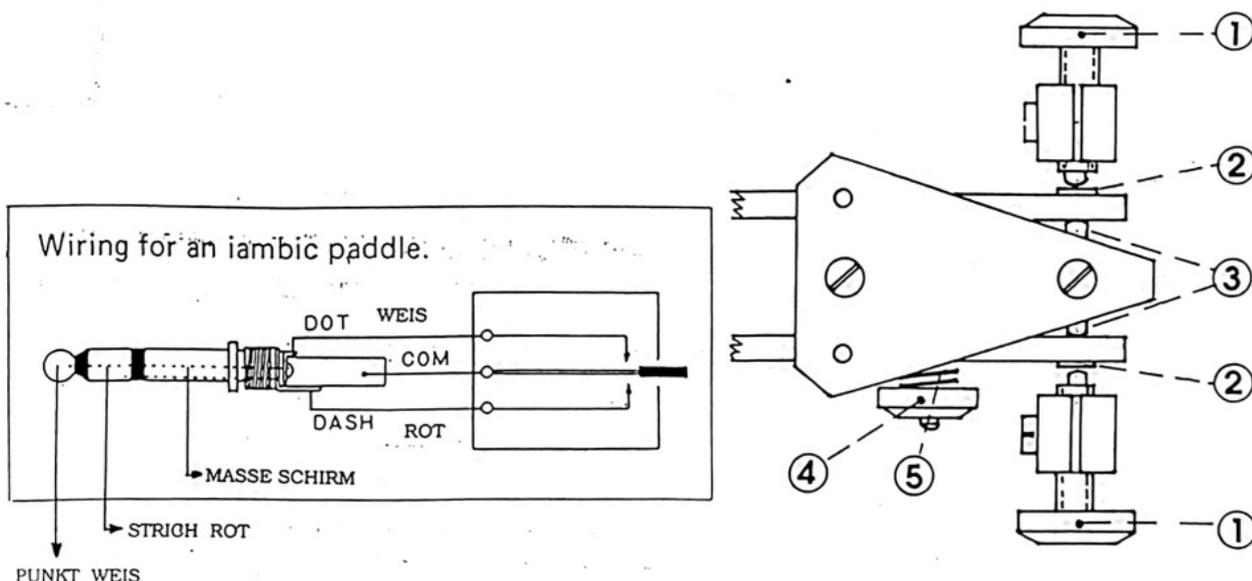


SCHURR

MORSETASTEN

what you should read

So you have bought a SCHURR-PADDLE! Maybe a satisfied OM-friend advised you to do it? In order to gain lots of fun and satisfaction from your "PADDLES" here are a few hints for good care and handling. SCHURR keys and wabbs are cut from full brass (MS58). The contact rivets are of hard silver. To keep the brass from corroding it has been air-brushed with clear laquering which, of course, should only be dusted with a soft, clean and dry rag. Moisture and solvents of any kind will destroy the fine finish. So clearly, pure indoor use is indicated for this nice piece. Feel free to put any kind of connector to the end of the cable. Whatever fits your TX, but the braid is ground (body of the key). The red lead connects to dashes, the white one to dots. Did you find the little cleaning paper for the contacts? Use it; or similiary rough paper. Do not use any paper of high assidity, because that is going to put the corrosion right back on. Same procedure needs to be applied to the inner contact stop (3). The bearings of the contact holders are made of finely sanded, hardened steel. They are self-adjusting and need no further service. The contact screws, of course, also set the width of play that you feel comfortable wwith, while the spring pressure is defined by the load screw (4) and spring (5). You will have to experiment a little to find your personal combination / setting *carefully!* Wish you satisfaction, fun and 55 with your new SCHURR key.
Your's DH2SAA

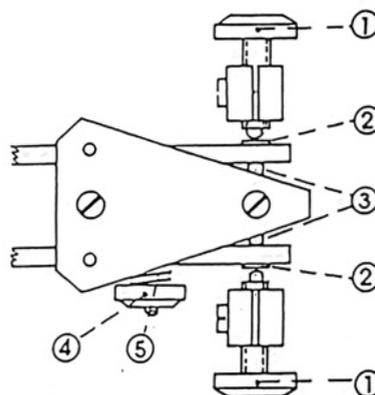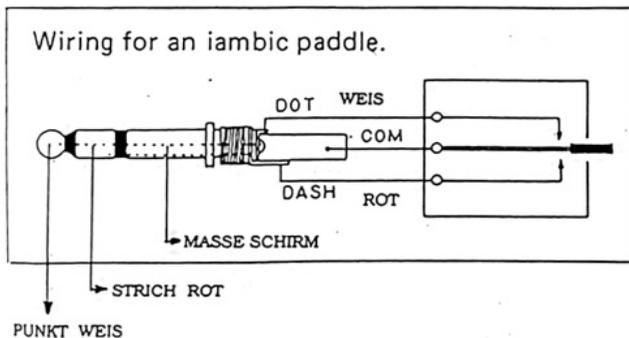

- (1) Contact Screws
- (2) Contact Rivets
- (3) Contact Stop
- (4) Spring Load Screw
- (5) Pressure Spring